


Logging Wire Rope - Regular 6x26 1WRC



DIA		Minimum Breaking Load in Metric Tons	
		6xWS(26)+IWRC	Approx Weight Kg/m
inch	mm	180kg/mm ² (1770N/mm ²)	
7/16	11.2	9.92	0.567
1/2	12.6	12.6	0.718
9/16	14.3	16.2	0.924
5/8	16.0	20.3	1.157
11/16	17.5	24.2	1.384
3/4	19.0	28.6	16.32
7/8	22.4	39.5	2.268
1	25.4	50.8	2.916
1-1/8	28.6	64.4	3.697
1-1/4	32	80.7	4.628
1-3/8	35.0	96.5	5.537

Logging Wire Rope - Swaged Rope

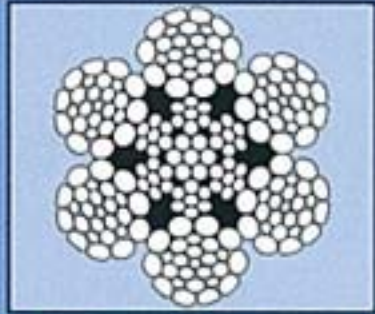

6 × WS(26)+IWRC

Sky Line
Logging

By swaging the surface of wire rope, this construction is strong against abrasion and crushing, while maintaining high breaking strength. This construction is mainly used in logging industry as a sky line.

- High Breaking Strength
- Excellent Abrasion and Crushing Resistance

DIA		Normal Swaged		Super Swaged	
mm	inch	Breaking Load in Metric Ton	Approx Weight kg/m	Breaking Load in Metric Ton	Approx Weight kg/m
11.2	7/16	11.07	0.694	12.18	0.703
12.6	1/2	14.52	0.878	15.97	0.905
14.3	9/16	18.33	1.071	20.53	1.166
16.0	5/8	22.41	1.301	25.10	1.442
17.5	11/16	27.15	1.547	30.41	1.747
19.0	3/4	32.02	1.818	35.86	2.059
20.6	13/16	37.64	2.113	42.16	2.420
22.2	7/8	43.36	2.753	48.56	2.811
24.0		50.22	3.108	54.24	3.285
25.4	1	56.25	3.482	60.75	3.679
28.6	1-1/8	71.32	4.301		
32.0	1-1/4	89.28	5.209		